

DWELLSCAPE™

WESTERN HORIZON

9 X 60 PLANK



SPECIFICATIONS

INSTALLATION TYPE:	Loose Lay/Glue Down
INSTALLATION LOCATION:	On, Above, or Below Ground
RADIANT HEAT:	Compatible with Radiant Heat
THICKNESS:	5mm
WEAR LAYER:	20mil
PLANK SIZE:	9" Wide X 60" Long
TEXTURE:	Embossed Wood Pattern
EDGE PROFILE:	Square Edge
SQ FT PER CARTON:	30 Sq Ft (56.22 lbs)



BUCKSKIN



HARVEST PLAINS



SCENIC BUTTE




IVORY TUSK



DRIFTWOOD



MESA BROWN

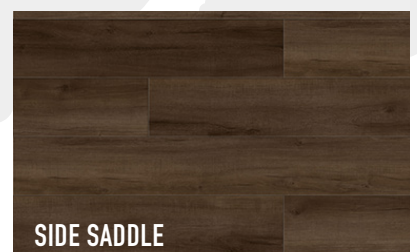

SIDE SADDLE

PRODUCT FEATURES AND BENEFITS

- TRUECORE™** Core constructed with premium fiberglass sheet for ultimate stability
- SURE-STAY™** Multi-function commercial backing for glue down or loose lay installations
- CeramaSHIELD™** Antimicrobial finish up to 3 Times more durable than the competition
- Products do not contain formaldehyde or ortho phthalates or heavy metals
- Waterproof moisture protection
- Easily replace damaged planks/tiles
- Limited Lifetime Residential & 15yrs Limited Commercial Warranty

*See warranty and care and maintenance

PERFORMANCE SPECIFICATIONS

Reaction to Fire	EN 13501-1+A1	Bfl-S1
Emission of Formaldehyde	EN 717-1	Class E1
Impact Sound Transmission	ASTM E492-09	IIC 56 (concrete slab with drop ceiling)
Flammability (Critical Radiant Flux)	ASTM E648-17a	Class I - 1.00 Watts/cm ²
Flexibility	ASTM F137-08	No Breaks or Cracks
Dimensional Stability (after exposure to heat)	ASTM F2199	(-) 0.007" Length, (-) 0.006" Width
Static Load Limit (conducted at 1000 lb)	ASTM F970-17	Residual Indentation: 0.005"
Static Coefficient of Friction	ASTM D2047-11	0.80
Light Stability (after 400 hours)	ASTM F1515-15	1.00Δ Delta E
Chemical Resistance	ASTM F925	No Change
Heat Stability	ASTM F1514-03	1.22Δ Delta E
Size & Squareness	ASTM F2421-05	Pass

WATERPROOF FLOORING | EMBOSSED WOOD LOOK